




THOR GUARD Model L125

LIGHTNING PREDICTION SYSTEM

The THOR GUARD L125 utilizes our proprietary atmospheric electrostatic analysis to predict the probability of a lightning discharge within a defined area. The hyperstatic sensor connects to the L125 allowing instantaneous evaluation of the energy. The LCD indicates the storm hazard level. When the probability of a lightning discharge has exceeded your pre-selected safe level, the L125 will activate an optional LED light.

Our custom software THOR PCX which has been designed to display lightning prediction data and warnings on your computer is provided. THOR PCX provides a graphic display and the saving of historical data from storms for future reference.

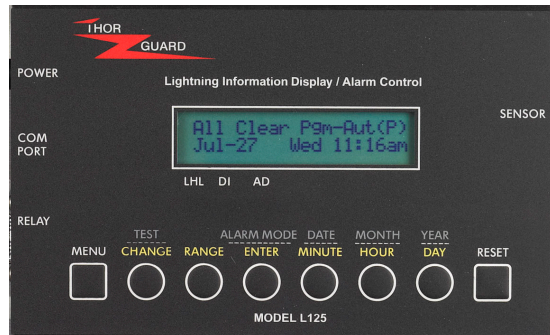

The combination of a THOR GUARD L125 and THOR PCX make companions for THOR GUARD Weather, our own internet weather data subscription service. No one can surpass our timely lightning warning and weather data delivery. All available only from THOR GUARD.

FEATURES

- Easy to read LCD display.
- “Field Collapse Count” indicator shows lightning discharges during storm activity.
- Unique “Activity Detector” displaying projected time until resumption of safe operations.
- Instant Lightning Hazard Level (LHL) and Dynamic Index (DI) displayed during a storm.
- All Clear, Caution, Warning, Red Alert, each distinct warning levels clearly displayed.
- 16 Range options available for different geographic areas and specialized applications.
- Programmable sensor self test every 24 hours at user selected time.
- Separate Test key provided to manually verify sensor operation.
- Connects to THOR GUARD’S THOR PCX visual display & storm storage software.
- One (DB9) RS 232 port to allow interface to run THOR GUARD’s THOR PCX (Optional).
- System diagnostics to facilitate & maintain correct operations.
- Compact design and robust construction, sealed tactile feedback membrane panel.
- Wall mounting.
- Red Alert visual warning available with an optional AMBER RED light fixture.
- Interfaces with THOR GUARD WEATHER (Optional).

SELECTED SPECIFICATIONS

Models: L125

Power Requirement: Voltage: 120 Volts AC, 60 Hz, Single Phase
Power: .25A (250ma), 22 Watts

Power Supply: 3-Plug, Wall Mounted, Grounded
120 VAC, 60 Hz
Dimensions: 3.45" H x 2.68" W x 2.19" D
Safety Specifications: UL, CSA
Power Cord: 6 ft. Weight: 1.5 Lbs.

Console: Dimensions: 7.25" L x 6.20" W x 1.50" H
Weight: 1 Lbs.

Hyperstatic Sensor: Dimensions: 4" W x 13" H
Weight: 2 Lbs. (Excluded Cable)
Construction: PVC - Sealed
Mounting: 1" Diameter Pipe

Sensor Cable: West Penn 5992 (Optional Plenum Cable)
3/8" Dia. Double Shielded Triaxial with Teflon Core
Standard Lengths Available 75ft., 125ft., 150 ft. (200 ft. Max. Length)

(Specifications & features subject to change without notice)



**Hyperstatic
Sensor**



**LED Strobe
Light**